



Wireless

data sheet

RAUSB

USB RF GATEWAY FOR RASOFT



WHAT IS IT ?

Designed to operate with the Rako RASOFT PC programming software.

The unit provides a wireless link from a PC running RASOFT to Rakom enabled receiver devices such as the RDL range of dimmers.

The RAUSB is a USB to RF interface for the RASOFT PC software suite



FLEXIBLE CONTROL

The RAUSB module allows a computer running the RASOFT programming software to communicate with Rakom wireless devices.

A free USB port is required.



Wireless

data sheet

RAUSB


USB RF GATEWAY FOR RASOFT



technical data

dimensions	160x50x36mm
input supply	5V DC (powered via USB port)
weight	125g
housing	UL V0 material
climate range	Temperature +2C to +40C Humidity +5% to 95% non condensing
connections	USB Type A male
system requirements	75Mb minimum disk space.
standards	Emissions - EN61000-6-3 : 2001 Immunity - EN61000-6-1 : 2001 LVD - EN 60950-1 :1992
communication	Rakom coded fm radio, 433.9MHz
memory	Flash memory (non volatile)

mechanical data

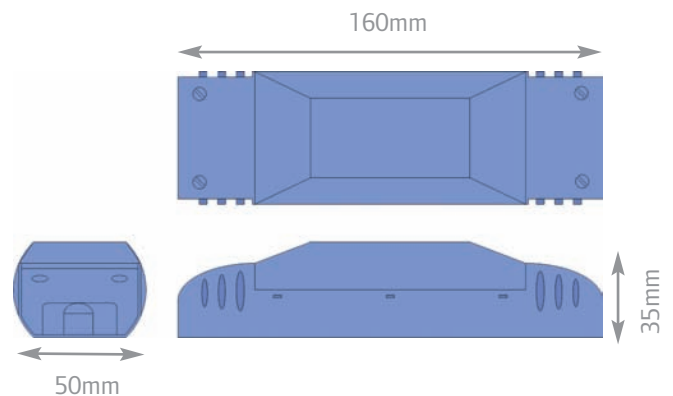

connection details



telephone +44 (0) 1634 226666 fax +44 (0) 1634 226667 www.rakocontrols.com

WE RESERVE THE RIGHT TO CHANGE THE SPECIFICATION AND DATA HEREWITH WITHOUT NOTICE.

© 2012 RAKO CONTROLS LIMITED